


Specifications (diffuse reflective type)

Feature	Model	Sensing distance (mm)	Min. sensing	Allowable bend radiu	Cable length (L)	Temp (C)
M6 Bolt	HG-D610	120	0.03	R30	2m	-40 to 70
M4 Bolt	HG-T410	500	1	R30	2m	-40 to 70

Appearance

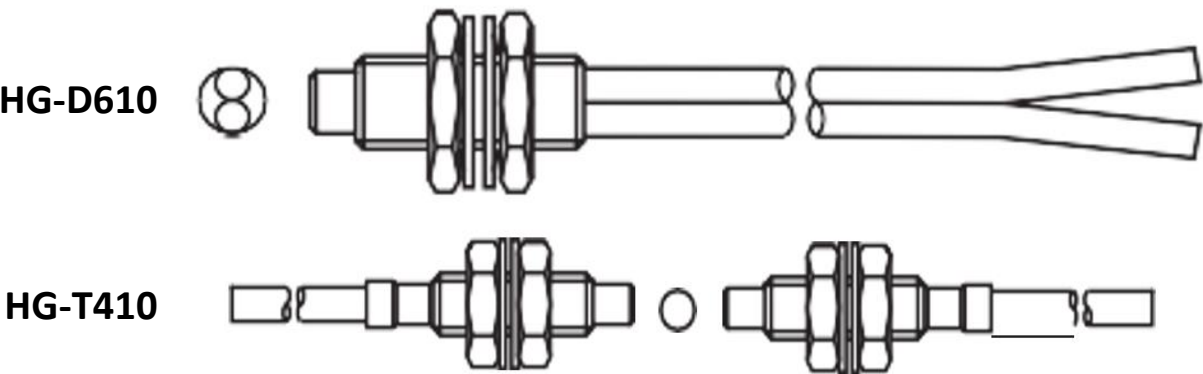

BERME

Sample

